



RF Relay UP

Wireless Relay

Technical Specifications and Installation Instructions

Item number 60534



Elsner Elektronik GmbH Control and Automation Engineering

Sohlengrund 16
75395 Ostelsheim
Germany

Phone +49 (0) 70 33 / 30 945-0 info@elsner-elektronik.de
Fax +49 (0) 70 33 / 30 945-20 www.elsner-elektronik.de

1. Product description

The **RF Relay UP** is a radio relay with a NO contactor. This is used with the WS1 or WS1000 Color/Style Control Systems or the Solexa II radio system or directly with the Remo 8/pro Remote Control.

If the **RF Relay UP** is used with a WS1000 or WS1, it can be configured in the control system menu as "Light", "Gutter heating", "Air conditioning", "Heating" or as "Supply air". With the setting "Relay" motors (such as for indoor fountains or pond pumps) can be switched on and off manually using the control system.

Functions:

- 1 dry relay contact (NO contact)
- Reception of the control signal via radio
- Suitable for: WS1 Color, WS1 Style, WS1000 Color, WS1000 Style, KNX WS1000 Style (as of software version 1.03), Solexa II, Remo 8 (as of version 0.1), Remo pro, Push Button Interface RF-B2-UP and Push Button Corlo P RF.

1.0.1. Safety advice



WARNING!

Risk of injury caused by components moved automatically!

If the wireless connection between the control unit and the wireless actuator is interrupted, connected devices can no longer be operated.

- For that reason do not connect drives to the wireless actuator which could be hazardous to human life!

1.1. Technical specifications

Mounting	Flush-mounting
Protection category	IP 20
Dimensions	ca. 38 x 47 x 29 (W x H x D, mm)
Weight	approx. 60 g
Ambient temperature	Operation -20...+70°C, Storage -55...+90°C
Operating voltage	230 V AC
Output	dry contact, max. 2 A / 250 V capacity
Radio frequency	868.2 MHz

The product conforms with the provisions of EU guidelines.

2. Installation and commissioning

2.1. Installation notes



Installation, testing, operational start-up and troubleshooting should only be performed by an electrician.



DANGER!

Risk to life from live voltage (mains voltage)!

There are unprotected live components within the device.

- VDE regulations and national regulations are to be followed.
 - Ensure that all lines to be assembled are free of voltage and take precautions against accidental switching on.
 - Do not use the device if it is damaged.
 - Take the device or system out of service and secure it against unintentional use, if it can be assumed, that risk-free operation is no longer guaranteed.
-

The device is only to be used for its intended purpose. Any improper modification or failure to follow the operating instructions voids any and all warranty and guarantee claims.

After unpacking the device, check it immediately for possible mechanical damage. If it has been damaged in transport, inform the supplier immediately.

The device may only be used as a fixed-site installation; that means only when assembled and after conclusion of all installation and operational start-up tasks and only in the surroundings designated for it.

Elsner Elektronik is not liable for any changes in norms and standards which may occur after publication of these operating instructions.


2.2. Notes on wireless equipment

When planning facilities with devices that communicate via radio, adequate radio reception must be guaranteed. The range of wireless control will be limited by legal regulation and structural circumstances. Avoid sources of interference and obstacles between receiver and transmitter, that could disturb the wireless communication. Those would be for example:


- Walls and ceilings (especially concrete and solar protection glazing).
- Metal surfaces next to the wireless participants (e. g. aluminium construction of a conservatory).
- Other wireless devices and powerful local transmitters (e.g. wireless headphones), which transmit on the same frequency (868,2 MHz). Please maintain a minimum distance of 30 cm between wireless transmitters for that reason.

2.3. Wiring

Power line 230 V AC:

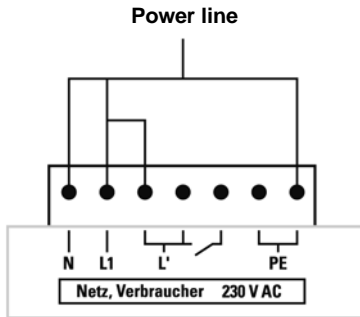

Consumer load:

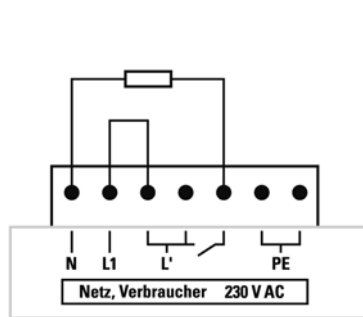

2.4. Establishing a wireless connection

If in the system there are several radio clients operating on one mains line, it is better to teach in every radio client separately *before* installation.

1. Set the control unit to the teach-in mode (observe the corresponding manual/data sheet).
2. Activate the radio device voltage supply. The device teaches itself in for the control unit within 3 seconds after the mains voltage is applied. Only one radio client can be recognised at a time.
3. Observe the response from the control system ("device taught-in").

2.5. Notes on mounting and commissioning

Device must not be exposed to water (rain). This could result in the electronic being damaged. A relative air humidity of 95% must not be exceeded. Avoid bedewing.